

G-BH1

Data sheet 2BH1 610


Side channel blower



Performance curves

Vacuum operation

Compressor operation

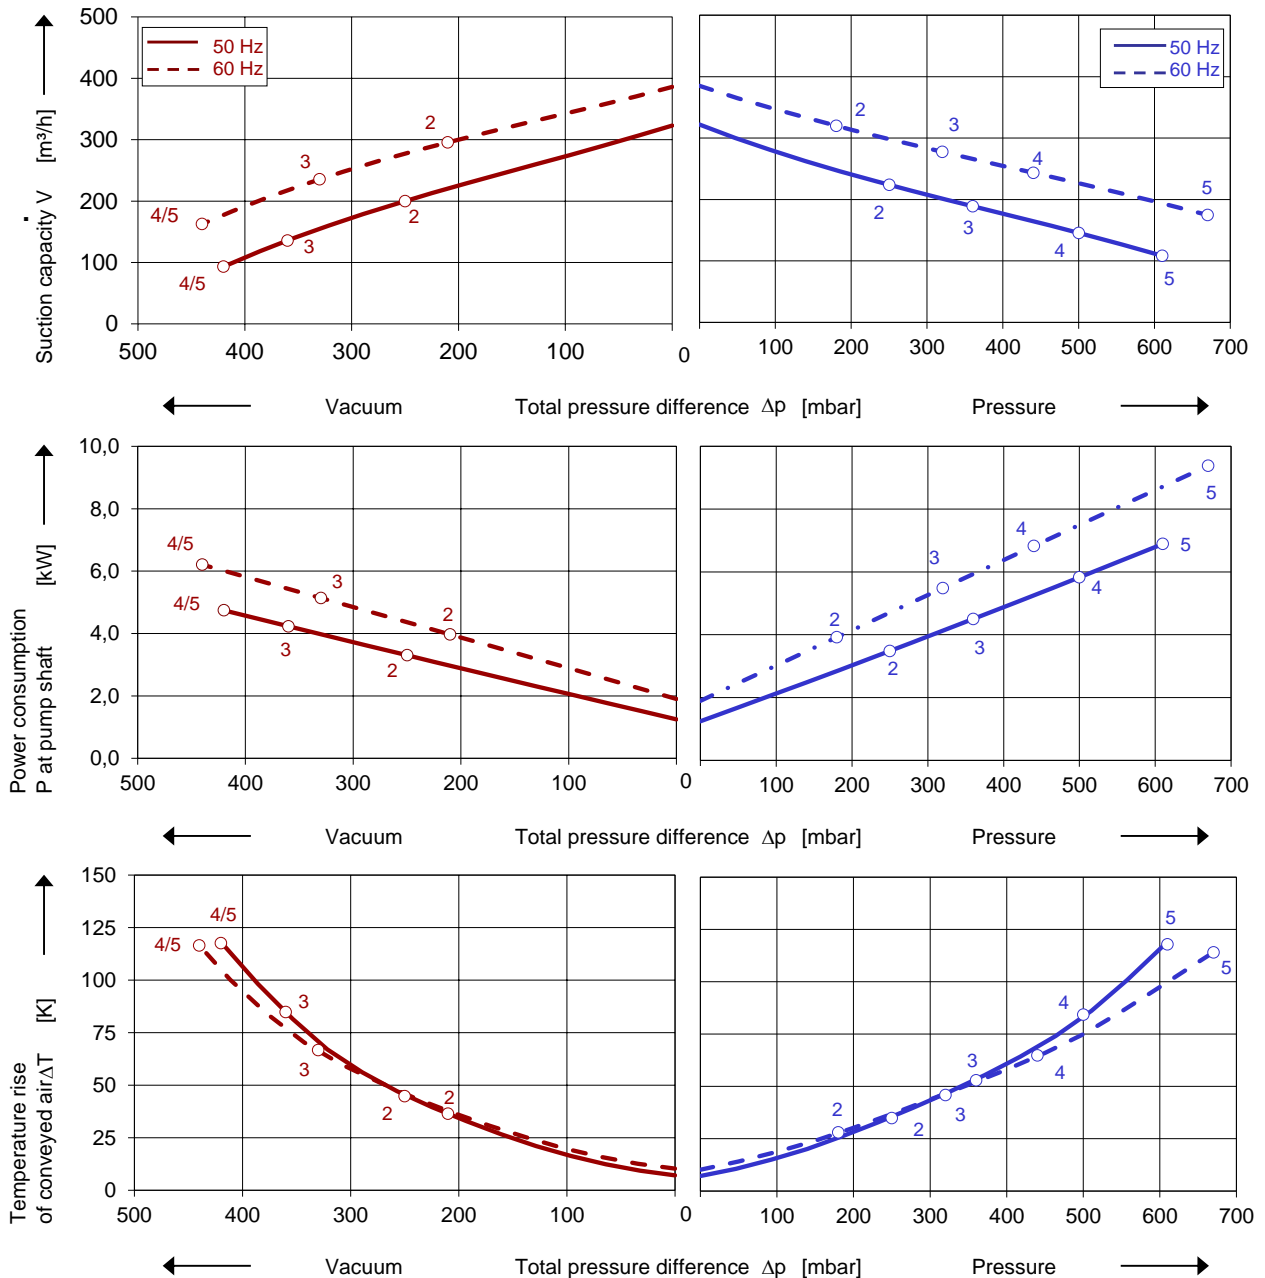

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of ± 10 %. The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

Every G-BH pump can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F. The vacuum pumps / compressors are UL and CSA approved.

Selection and ordering data

Type 2BH1 610

No.	Fre- quency	Rated			Max. differential pressure		pressure level	Weight Approx.	Order No.
		Voltage	Current	Power	Vacuum	Pressure			
3- 50/60 Hz, IP55, Insulation material class F, UL 1450 and CNA/CSA 22.2 No 68-09 (certificate number E225239)									
2	50	345-415 Δ / 600-720 Y	7,2 Δ / 4,2 Y	3,0	-250	250	71	50	2BH1610-1HH27
	60	380-480 Δ	7,3 Δ	3,45	-210	180	75		
3	50	345-415 Δ / 600-720 Y	10,0 Δ / 5,8 Y	4,3	-360	360	71	60	2BH1610-1HH37
	60	380-480 Δ	10,4 Δ	4,8	-330	320	75		
4	50	345-415 Δ / 600-720 Y	13,3 Δ / 7,7 Y	5,5	-420	500	71	66	2BH1610-1HH47
	60	380-480 Δ	13,3 Δ	6,3	-440	440	75		
5	50	345-415 Δ / 600-720 Y	16,7 Δ / 9,6 Y	7,5	-420	610	71	72	2BH1610-1HH57
	60	380-480 Δ	17,3 Δ	8,6	-440	670	75		
3- 50/60 Hz, IP55, Insulation material class F, UL 1450 and CNA/CSA 22.2 No 68-09 (certificate number E225239)									
2	50	500 Y	5,7 Y	3,0	-250	250	71	50	2BH1610-1HC23
	60	575 Y	5,8 Y	3,45	-210	180	75		
3	50	500 Y	7,5 Y	4,0	-360	360	71	60	2BH1610-1HC33
	60	575 Y	7,6 Y	4,6	-330	320	75		
4	50	500 Y	10,5 Y	5,5	-420	500	71	66	2BH1610-1HC43
	60	575 Y	10,4 Y	6,3	-440	440	75		
5	50	500 Y	13,0 Y	7,5	-420	610	71	72	2BH1610-1HC53
	60	575 Y	13,6 Y	8,6	-440	670	75		

- 1) In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 460 V.
- 2) Relief valves available for limiting differential pressure.
- 3) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).

All G-BH match the 2006/42/EC (machinery) and 2014/35/EU (low voltage) directives and the EN 60034 norm "Rotating electrical machines".

The motors comply with EN 60 034 (IEC 60034) and thermal class F.

For three phase motors tolerances are +/-10% for fixed voltage motors and +/-5% for voltage range motors. Single phase machines are designed with a +/- 5% tolerance.

The frequency tolerance is +/- 2% maximum.

Motor for alternate voltages [V]

Voltage range		Fixed voltage		VFD	C _{RU} US		2BH1610-..		
50 Hz	60 Hz	50 Hz	60 Hz	87 Hz	60 Hz	Δ	Y	□	
3-									
185 - 225 Δ / 320 - 390 Y 200 - 240 Δ / 345 - 415 Y 345 - 415 Δ / 600 - 720 Y	200 - 240 Δ / 345 - 415 Y 220 - 275 Δ / 380 - 480 Y 380 - 480 Δ / 660 - 720 Y	500 Y	575 Y	380 Δ	•	•	•	H H H C C	1 6 7 3 5
Voltage range				efficiency degree ⁴⁾	C _{RU} US		2BH1610-..		
50 Hz	60 Hz			60 Hz	□	□	□	□	
3- IE3 NEMA Premium⁵⁾									
200 Δ	200 YY / 230 Δ / 400 Y			NEMA Premium	•			K	1
190-210 Δ	190-210 YY / 220-240 Δ / 380-420 Y			IE3	•			K	6
200 YY / 230 Δ / 400 Y	230 YY / 460 Y			NEMA Premium	•			K	6
190-210 YY / 220-240 Δ / 380-420 Y	220-240 YY / 440-480 Y			IE3	•			K	6
475-525 V Y	550-600 V Y			NEMA Premium	•			Q	3
475-525 V Δ	550-600 V Δ			NEMA Premium	•			Q	5
400 V Δ / 690 V Y	460 V Δ			NEMA Premium	•			Q	7

4) The motors according to NEMA MG1-12. NP=NEMA Premium; NEMA Premium includes IE3.

5) Performance can differ if IE3/NP motors are used. Please refer to corresponding data sheets.

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given does not constitute an obligation from our side to deliver as shown.



Your Ultimate Source for Vacuum and Pressure

Gardner Denver Deutschland GmbH
 Industriestraße 26
 97616 Bad Neustadt - Germany
 Tel.: +49 9771 6888-0
 Fax: +49 9771 6888-4000
 www.gd-elmorietschle.com • er.de@gardnerdenver.com

Gardner Denver Schopfheim GmbH
 Johann-Sutter-Straße 6+8
 79650 Schopfheim - Germany
 Tel.: +49 7622 392-0
 Fax: +49 7622 392-300