


G-BH 7 N

Data sheet 2BH7 520

Side channel blower with IE3-motors

IE3


CEC US



Performance curves

Vacuum operation

Compressor operation

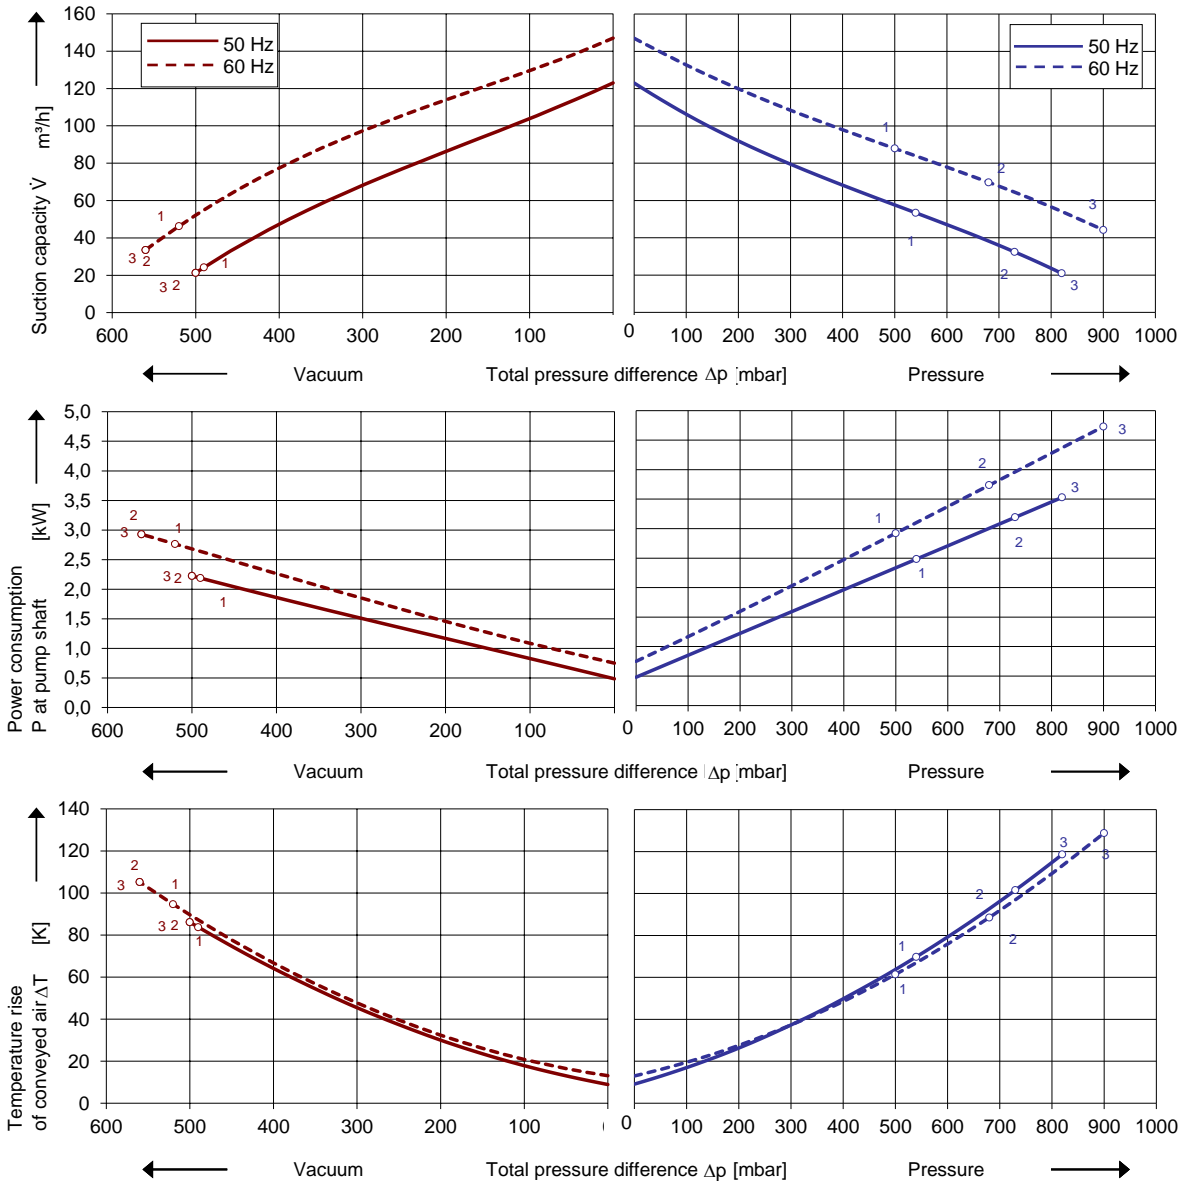

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of $\pm 10\%$. The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

Every G-BH pump can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F. The vacuum pumps / compressors are UL and CSA approved.

Selection and ordering data

Type 2BH7 520

| No. | Frequency Hz | Rated | | | Max. differential pressure ²⁾ | | Sound pressure level ³⁾ dB(A) | Efficiency ⁴⁾ 0 | Weight Approx. kg | Order No. |
|---|-----------------|----------------------------|-----------------|-------------|--|----------|---|-------------------------------|----------------------|-----------------|
| | | Voltage ¹⁾ V | Current A | Power kW | Vacuum mbar | Pressure | | | | |
| IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1450 and CAN/CSA C22.2 No. 68-09 (certificate number E225239) | | | | | | | | | | |
| 1 | 50 | 190-210 Δ | 9,9 Δ | 2,5 | -490 | 540 | 64 | IE3 | 50 | 2BH7520-0AK21-1 |
| | 60 | 190-210 YY / 380-420 Y | 12,0 YY / 6,0 Y | 3,0 | -520 | 500 | 68 | IE3 | | |
| | 60 | 200 YY | 12,0 YY | 3,0 | -520 | 500 | 68 | NP | | |
| 2 | 50 | 190-210 Δ | 13,3 Δ | 3,5 | -500 | 730 | 67 | IE3 | 54 | 2BH7520-0AK51-1 |
| | 60 | 190-210 YY / 380-420 Y | 15,2 YY / 7,6 Y | 4,0 | -560 | 680 | 73 | IE3 | | |
| | 60 | 200 YY | 15,2 YY | 4,0 | -560 | 680 | 73 | NP | | |
| 3 | 50 | 190-210 Δ | 17,1 Δ | 4,6 | -500 | 820 | 65 | IE3 | 61 | 2BH7520-0AK71-1 |
| | 60 | 190-210 YY / 380-420 Y | 19,6 YY / 9,8 Y | 5,3 | -560 | 900 | 70 | IE3 | | |
| | 60 | 200 YY | 19,6 YY | 5,3 | -560 | 900 | 70 | NP | | |
| IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1450 and CAN/CSA C22.2 No. 68-09 (certificate number E225239) | | | | | | | | | | |
| 1 | 50 | 220-240 Δ / 380-420 Y | 8,6 Δ / 5,0 Y | 2,5 | -490 | 540 | 64 | IE3 | 50 | 2BH7520-0AK26-1 |
| | 60 | 220-240 YY / 440-480 Y | 10,4 YY / 5,2 Y | 3,0 | -520 | 500 | 68 | IE3 | | |
| | 60 | 230 YY / 460 Y | 10,4 YY / 5,2 Y | 3,0 | -520 | 500 | 68 | NP | | |
| 2 | 50 | 220-240 Δ / 380-420 Y | 11,6 Δ / 6,7 Y | 3,5 | -500 | 730 | 67 | IE3 | 54 | 2BH7520-0AK56-1 |
| | 60 | 220-240 YY / 440-480 Y | 13,2 YY / 6,6 Y | 4,0 | -560 | 680 | 73 | IE3 | | |
| | 60 | 230 YY / 460 Y | 13,2 YY / 6,6 Y | 4,0 | -560 | 680 | 73 | NP | | |
| 3 | 50 | 220-240 Δ / 380-420 Y | 14,9 Δ / 8,6 Y | 4,6 | -500 | 820 | 65 | IE3 | 61 | 2BH7520-0AK76-1 |
| | 60 | 220-240 YY / 440-480 Y | 17,0 YY / 8,5 Y | 5,3 | -560 | 900 | 70 | IE3 | | |
| | 60 | 230 YY / 460 Y | 17,0 YY / 8,5 Y | 5,3 | -560 | 900 | 70 | NP | | |
| IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1450 and CAN/CSA C22.2 No. 68-09 (certificate number E225239) | | | | | | | | | | |
| 1 | 50 | 500 Y | 4,0 Y | 2,5 | -490 | 540 | 64 | IE3 | 50 | 2BH7520-0AQ23-1 |
| | 60 | 575 Y | 4,1 Y | 3,0 | -520 | 500 | 68 | NP | | |
| 2 | 50 | 500 Y | 5,4 Y | 3,5 | -500 | 730 | 67 | IE3 | 54 | 2BH7520-0AQ53-1 |
| | 60 | 575 Y | 5,3 Y | 4,0 | -560 | 680 | 73 | NP | | |
| 3 | 50 | 500 Y | 6,9 Y | 4,6 | -500 | 820 | 65 | IE3 | 61 | 2BH7520-0AQ73-1 |
| | 60 | 575 Y | 6,8 Y | 5,3 | -560 | 900 | 70 | NP | | |
| IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1450 and CAN/CSA C22.2 No. 68-09 (certificate number E225239) | | | | | | | | | | |
| 1 | 50 | / | | | | | 64 | | 50 | 2BH7520-0AQ26-1 |
| | 60 | | | | | | 68 | | | |
| | 60 | | | | | | 68 | | | |
| 2 | 50 | / | | | | | 67 | | 54 | 2BH7520-0AQ56-1 |
| | 60 | | | | | | 73 | | | |
| | 60 | | | | | | 73 | | | |
| 3 | 50 | / | | | | | 65 | | 61 | 2BH7520-0AQ76-1 |
| | 60 | | | | | | 70 | | | |
| | 60 | | | | | | 70 | | | |
| IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1450 and CAN/CSA C22.2 No. 68-09 (certificate number E225239) | | | | | | | | | | |
| 1 | 50 | 380-420 Δ / | 5,0 Δ / | 2,5 | -490 | 540 | 64 | IE3 | 50 | 2BH7520-0AQ27-1 |
| | 60 | | | 3,0 | -520 | 500 | 68 | IE3 | | |
| | 60 | 460 Δ | | 3,0 | -520 | 500 | 68 | NP | | |
| 2 | 50 | 380-420 Δ / | 6,7 Δ / | 3,5 | -500 | 730 | 67 | IE3 | 54 | 2BH7520-0AQ57-1 |
| | 60 | | | 4,0 | -560 | 680 | 73 | IE3 | | |
| | 60 | 460 Δ | | 4,0 | -560 | 680 | 73 | NP | | |
| 3 | 50 | 380-420 Δ / 690 Y | 8,6 Δ / ### U | 4,6 | -500 | 820 | 65 | IE3 | 61 | 2BH7520-0AQ77-1 |
| | 60 | | | 5,3 | -560 | 900 | 70 | IE3 | | |
| | 60 | 460 Δ | | 5,3 | -560 | 900 | 70 | NP | | |

1) In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 500 V.

2) Relief valves available for limiting differential pressure.

3) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).










4) The motors according to NEMA MG1-12. NP=NEMA Premium; NEMA Premium includes IE3.

All G-BH match the 2006/42/EC (machinery) and 2014/35/EU (low voltage) directives and the EN 60034 norm "Rotating electrical machines".

Service factor (SF) and motor efficiency according NEMA MG1-12.

Voltage tolerances for three phase motors are +/-10%.

The frequency tolerance is +/- 2 % maximum.

| Motor for alternate voltages | | | | | | |
|--------------------------------------|---|--|---|-----------|-------|----|
| | | Efficiency ⁴⁾ |  | | | |
| 50 Hz | 60Hz | | 60 Hz | 2BH7....- | □ . □ | -1 |
| 3~ | | | | | | |
| 200 VD | 200 V YY / 230 VD / 400 VY |  | • | | K | 1 |
| 190-210 VD | 190-210 $\zeta\Psi\Psi$ / 220-240 $\zeta\Delta$ / 380-420 $\zeta\Psi$ |  | • | | K | 6 |
| 200 V YY / 230 VD / 400 VY | 230 V YY / 460 VY |  | • | | K | 6 |
| 190-210 VYY / 220-240 VD / 380-420VY | 220-240 VYY / 440-480VY |  | • | | K | 6 |
| 475-525 V Y | 550-600 V Y |  | • | | Q | 3 |
| 475-525 VD | 550-600 VD |  | • | | Q | 5 |
| 220-240 VD / 380-420 V Y | 440-480 V Y |  | • | | Q | 6 |
| 400 VD / 690 V Y | 460 VD |  | • | | Q | 7 |

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given does not constitute an obligation from our side to deliver as shown.



Your Ultimate Source for Vacuum and Pressure

Gardner Denver Deutschland GmbH

Industriestraße 26
97616 Bad Neustadt - Germany
Tel.: +49 9771 6888-0
Fax: +49 9771 6888-4000

www.gd-elmorietschle.com

Gardner Denver Schopfheim GmbH

Johann-Sutter-Straße 6+8
79650 Schopfheim - Germany

Tel.: +49 7622 392-0
Fax: +49 7622 392-300

er.de@gardnerdenver.com